

Introduction

Positioned in environmental-friendly and economical PV market, the product is applicable to PV pump system, replaces water storage with electric storage and needs no battery modules. The direct current generated by solar modules is input to the inverter and then converted into the alternating current to drive various pumps directly. Additionally, the output frequency is adjustable in real time according to sunlight intensity change.



Features

- Maximizing power generation efficiency of solar modules with the use of advanced MPPT control technology
- Adjusting water outflow of pumps quickly on basis of sunlight intensity change
- Automatic hibernation and wakeup
 - (1)Hibernate at high water level and wake up at low water level
 - (2)Hibernate at sunrise and sunset and wake up at strong sunlight
- Underload protection and fault protection of water level sensor avoiding pumping off after water supply dries up
- TI DSP technology and Infineon PIM design, with functions of overcurrent, overvoltage and overtemperature protection, built-in C3 filter, achieving reliable, automatic and unattended running

Application

Mainly applied to industries of agriculture and forestry irrigation, desert control, grassland animal husbandry and municipal water

Specifications

1.parameters

	220V	380V
Max input DC voltage	410V	800V
Recommended MPPT voltage range	270~400VDC	350~750VDC
Recommended input voltage	310V	513V
MPPT	99.9%	
Input channel	1	
Rated output voltage	3-phase 220VAC	3-phase 380VAC
Output frequency range	0-60HZ	
Max efficiency of the machine	97%	
Ambient temperature range	-10℃~50℃,derate if the temperature is above 40℃	
Cooling method	Air cooling	
Protection degree	IP20	
Altitude	Below 1000m;above 1% for every additional 100m	
Standard	CE	

2.power degree

Inverter model	Max DC input current(A)	Rated output current (A)	Applicable water pump (kW)
5100-01-0R7G-4	4.2	2.5	0.75
5100-01-1R5G-4	6.1	3.7	1.5
5100-01-2R2G-4	7.1	5	2.2
5100-01-004G-4	16.5	9.5	4
5100-01-5R5G-4	23.9	14	5.5
5100-01-7R5G-4	30.6	18.5	7.5
5100-01-011G-4	39.2	25	11
5100-01-015G-4	49.0	32	15

Note: When the output voltage is 380V, the output current will be the rated value; when the output voltage is at 400V, 415V or 440V, the output current will be calculated according to power.

Inverter model	Max DC input current(A)	Rated output current (A)	Applicable water pump (kW)
5100-01-0R7G-2	6.7	4.5	0.7
5100-01-1R5G-2	9.9	7	1.5
5100-01-2R2G-2	14.1	10	2.2
5100-01-004G-2	22.6	16	4
5100-01-5R5G-2	28.2	20	5.5
5100-01-7R5G-2	38.2	27	7.5


Note: When the output voltage is 220V, the output current will be the rated value.

3.Recommended solar array configuration

Inverter model	Max DC input current(A)	Open-circuit voltage degree of solar module											
		20±3V		30±3V		36±3V				42±3V			
		Module power ±5Wp	Modules per string *string	Module power ±5Wp	Modules per string *string	Module power ±5Wp	Modules per string *string	Module power ±5Wp	Modules per string *string	Module power ±5Wp	Modules per string *string	Module power ±5Wp	Modules per string *string
5100-01-0R7G-2	6.7	50	16*1	-	-	-	-	-	-	-	-	-	-
5100-01-1R5G-2	9.9	110	16*1	165	11*1	-	-	-	-	-	-	-	-
5100-01-2R2G-2	14.1	-	-	120	11*2	150	9*2	-	-	330	8*1	-	-
5100-01-004G-2	22.6	-	-	220	11*2	135	9*4	-	-	300	8*2	-	-
5100-01-5R5G-2	28.2	-	-	300	11*2	250	9*3	-	-	-	-	-	-
5100-01-7R5G-2	38.2	-	-	-	-	250	9*4	-	-	225	8*5	-	-
5100-01-0R7G-4	4.2	30	29*1	-	-	-	-	-	-	-	-	-	-
5100-01-1R5G-4	6.1	60	30*1	-	-	-	-	-	-	-	-	-	-
5100-01-2R2G-4	7.1	90	30*1	-	-	145	18*1	-	-	175	15*1	-	-
5100-01-004G-4	16.5	85	28*2	220	22*1	140	17*2	-	-	160	15*2	-	-
5100-01-5R5G-4	23.9	-	-	-	-	195	17*2	-	-	220	15*2	-	-
5100-01-7R5G-4	30.6	-	-	215	21*2	175	17*3	-	-	200	15*3	300	15*2
5100-01-011G-4	39.2	-	-	200	22*3	195	17*4	-	-	220	15*3	-	-
5100-01-015G-4	49	-	-	205	22*4	175	17*6	200	18*5	240	15*5	300	15*4

*Recommended DC input power is about 1.2 times of inverter rated power
*STC:Irradiance 1000 W/m²,module temperature 25 °C,AM=1.5

4.Dimension

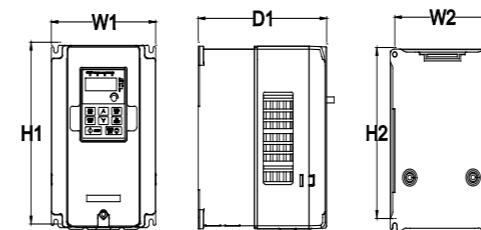

Wall mounting manner

Inverter Power		W1	W2	H1	H2	D1	Hole size
220V	0.75kw-1.5kw	126.0	115.0	186.0	175.0	155.0	5
	2.2kw-4kw	146.0	131.0	256.0	243.5	167.0	6
	5.5kw-7.5kw	170.0	151.0	320.0	303.5	196.3	6
380V	0.75kw-2.2kw	126.0	115.0	186.0	175.0	155.0	5
	4kw-5.5kw	146.0	131.0	256.0	243.5	167.0	6
	7.5kw-15kw	170.0	151.0	320.0	303.5	196.3	6